
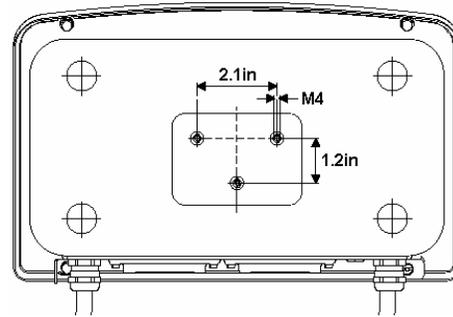
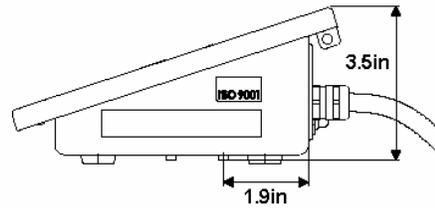


CISL1-IS

Combics Indicator for IS Series Scale

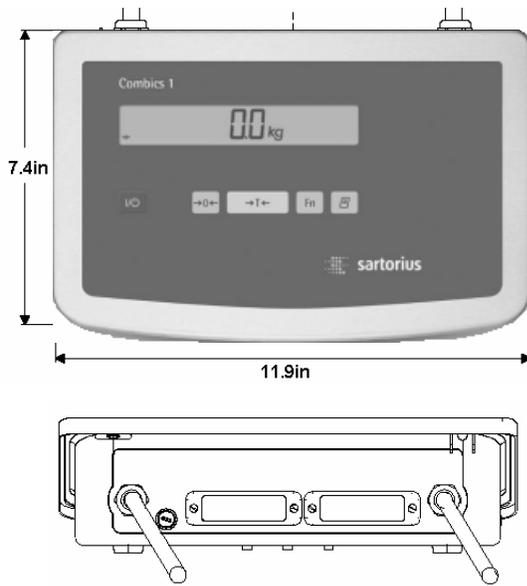

SPECIFICATIONS:

Power Supply: Standard Equipment
Requirements: 120->240 VAC, 17W/23VA Max
Optional: 15.5->24VDC, 17W max.

Housing: AISI 304 Stainless Steel
Prot. Rating: IP44
Optional: IP65 / NEMA 4 with YAS01CISL

Oper. Temp.: +14 to 104 °F / -10 to +40 °C

Dimensions: 11.9"W x 7.4"D x 3.5"H
Net Weight: 7 lb

Display: 0.8in, 7 Segment Backlit LCD

COM1: RS-232 interface, DB25 female

FEATURES:

Large, positive click action keypad;
ON/OFF Zero, Tare, Function, Print

Function Key for Applications,
Gross/Net Toggling
Three Weight Unit Toggling
Display 10X higher resolution

Optional 2nd interface, UniCOM, with choice of;
RS-232: YDO01C-232,
RS-485, RS-422: YDO01C-485
Analog Output 0/20mA: YDA01C-20MA
ProfiBus: YDO01-DP3
Ethernet TCP/IP YDO01C-EN

Port connector for battery operation
Battery Charge Status Display, when used with
options; YRB10Z and YCC02-RB02

Sartorius Mechatronics Corporation
5 Orville Drive
Bohemia NY 11716

Sartorius Canada
2179 Dunwin Dr. Units 4 & 5
Mississauga Ontario L5L 1X2

Toll Free: (800) 635-2906
☎ (631) 254-4249
Fax: (631) 254-4252

Toll Free: (800) 668-4264
☎ (905) 569-7977
Fax: (905) 569-7021