




Midrics Weighing Platforms (USA/Canada Versions) MAP(P, S) 4U- __ KK, NN, RR -LU



- Painted models are IP65 protected and thus suitable for industrial use.
- Stainless steel models are IP67/68 protected and thus suitable for industrial use in wet environments (AISI type 304 stainless steel)
- Welded load plate
- Four load cells IP67/IP68 protected, junction box IP67 protected.
- Rugged construction with overload stop.
- 4 adjustable leveling feet with level indicator
- Operating temperature: +14°F -104°F (-10°C to +40°C)
- Cable length: 20 ft.
- NTEP/CSA Pending
- Overload capacity: up to 9,900 lbs

Painted and Stainless Steel Versions

a (in.)	b (in.)	c (in.)	d (in.)	e (in.)	Design
36	36	3.77 - 4.08	31.5	31.5	...KK -
48	48	3.77 - 4.08	43.5	43.5	...NN -
60	60	3.77 - 4.08	55.5	55.5	...RR -

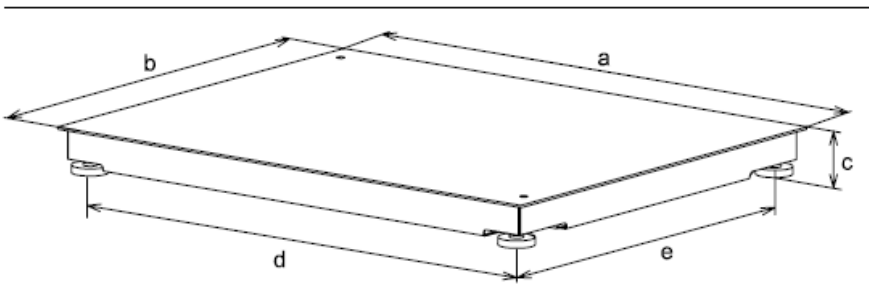

Midrics weighing platforms (USA/Canada Versions)

MAP(P, S) 4U- __ KK, NN, RR -LU

Model	Capacity lbs	Readability lbs	Max. Preload lbs	Max. overload center lbs	Max. overload side lbs	Max. overload corner lbs	Capacity Kg	Readability Kg
MAPP4U-1000KK-L	1500	0.1	100	9900	4500	2500	600	0.05
MAPP4U-2500KK-L	3000	0.2	250	9900	4500	2500	1500	0.1
MAPP4U-5000KK-L	6000	0.5	500	9900	4500	2500	3000	0.2
MAPP4U-1000NN-L	1500	0.1	150	9900	4500	2500	600	0.05
MAPP4U-2500NN-L	3000	0.2	300	9900	4500	2500	1500	0.1
MAPP4U-5000NN-L	6000	0.5	1000	9900	4500	2500	3000	0.2
MAPP4U-1000RR-L	1500	0.1	150	9900	4500	2500	600	0.05
MAPP4U-2500RR-L	3000	0.2	300	9900	4500	2500	1500	0.1
MAPP4U-5000RR-L	6000	0.5	1000	9900	4500	2500	3000	0.2
MAPS4U-1000KK-L	1500	0.1	150	9900	4500	2500	600	0.05
MAPS4U-2500KK-L	3000	0.2	300	9900	4500	2500	1500	0.1
MAPS4U-5000KK-L	6000	0.5	1000	9900	4500	2500	3000	0.2
MAPS4U-1000NN-L	1500	0.1	150	9900	4500	2500	600	0.05
MAPS4U-2500NN-L	3000	0.2	300	9900	4500	2500	1500	0.1
MAPS4U-5000NN-L	6000	0.5	1000	9900	4500	2500	3000	0.2
MAPS4U-1000RR-L	1500	0.1	150	9900	4500	2500	600	0.05
MAPS4U-2500RR-L	3000	0.2	300	9900	4500	2500	1500	0.1
MAPS4U-5000RR-L	6000	0.5	1000	9900	4500	2500	3000	0.2

Platform	Size	Packaging	Gross Weight	Net Weight
Midrics KK	36"X36"	Pallet	205 lbs	165 lbs
Midrics NN	48"X48"	Pallet	311 lbs	266 lbs
Midrics RR	60"X60"	Pallet	417 lbs	372 lbs

Midrics Rectangular Indicators



Midrics 1: MIS1-UR
 Stainless Steel Construction
 20mm Backlit LC Display
 Ingress Protection: IP65
 Simple Operation
 Wall Mount Included

Midrics 2: MIS2-UR
 All Features of the MIS1-UR
 Numeric Keypad and ID's
 Multiple Applications
 Wall Mount Included

Sartorius Mechatronics Corporation
 131 Heartland Boulevard
 Edgewood NY 11717

Toll Free: (800) 635-2906
 ☎ (631) 254-4249
 Fax (631) 254-4252

www.SartoNews.com

Sartorius Canada
 2179 Dunwin Dr. Units 4 & 5
 Mississauga Ontario L5L 1X2

Toll Free: (800) 668-4264
 ☎ (905) 569-7977
 Fax (905) 569-7021