

Midrics weighing platforms

Painted & Stainless Steel Versions GF, IG



- Painted models are IP65 protected and thus suitable for industrial use.
- Stainless steel models are IP67 protected and thus suitable for industrial use in damp environments (AISI type 304 stainless steel)
- AISI type 304 stainless steel load plate on both versions
- One C 3 single point weigh cell
- Rugged construction with overload stop
- Easy to clean thanks to innovative design, minimal horizontal surface
- 4 adjustable leveling feet
- Cable length: 2.5 m
- Operating temperature: -10°C to +40°C (+14°F to +104°F)
- Resolution 15,000 d.


Standard versions

a (mm) / (in)	b (mm) / (in)	c (mm) / (in)	d (mm) / (in)	e (mm) / (in)
650 / 25.6	500 / 19.7	142...162 / 5.6...6.4	603 / 23.7	453 / 17.8
800 / 32	600 / 24	142...162 / 5.6...6.4	752 / 29.6	552 / 21.7

Stainless steel versions

Design	a (mm) / (in)	b (mm) / (in)	c (mm) / (in)	d (mm) / (in)	e (mm)
...GF -	650 / 25.6	500 / 19.7	140...160 / 5.5...6.3	603 / 23.7	453 / 17.8
...IG -	800 / 32	600 / 24	140...160 / 5.5...6.3	752 / 29.6	552 / 21.7

Weighing capacity in kg	Order no.	Order no.	Overload capacity in kg
	epoxy-coated steel versions	stainless steel versions L	
60	MAPP1-60GF-	MAPS4-60GF-	200
	MAPP1-60IG-	MAPS4-60IG-	
150	MAPP1-150GF-	MAPS4-150GF-	200
	MAPP1-150IG-	MAPS4-150IG-	
300	MAPP1-300GF-	MAPS4-300GF-	400
	MAPP1-300IG-	MAPS4-300IG-	

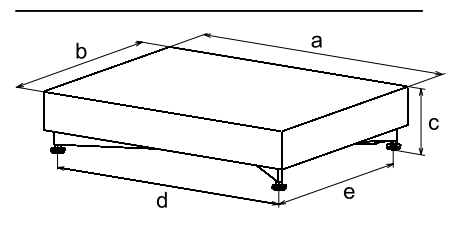



Packaged weight; dimensions

60kg, 150kg versions:

Code of dimensions	Platform size	Net weight in kg	Shipping weight in kg / lbs
GF	650 x 500mm	21	33.2 / 73
IG	800 x 600mm	28	42.1 / 92.8

300kg versions:

Code of dimensions	Platform size	Net weight in kg	Shipping weight in kg / lbs
GF	650 x 500mm	28	42.1 / 92.8
IG	800 x 600mm	38	52.1 / 115

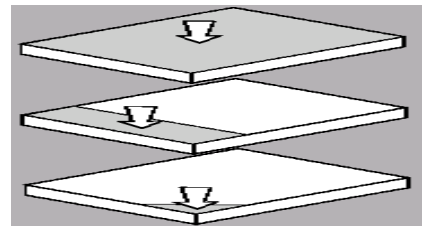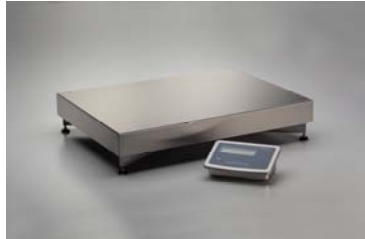

Preload; operating limits:

Epoxy-coated versions

Weighing capacity	Dimensions	Max. preload	Max. overload, center	Max. overload, side	Max. overload, corner
60 kg	650 x 500 mm	6 kg	200 kg	150 kg	100 kg
60 kg	800 x 600 mm	6 kg	200 kg	150 kg	100 kg
150 kg	650 x 500 mm	15 kg	200 kg	150 kg	100 kg
150 kg	800 x 600 mm	15 kg	200 kg	150 kg	100 kg
300 kg	650 x 500 mm	30 kg	400 kg	300 kg	200 kg
300 kg	800 x 600 mm	30 kg	400 kg	300 kg	200 kg

Stainless steel versions

Weighing capacity	Dimensions	Max. preload	Max. overload, center	Max. overload, side	Max. overload, corner
60 kg	650 x 500 mm	6 kg	200 kg	150 kg	100 kg
60 kg	800 x 600 mm	6 kg	200 kg	150 kg	100 kg
150 kg	650 x 500 mm	15 kg	200 kg	150 kg	100 kg
150 kg	800 x 600 mm	15 kg	200 kg	150 kg	100 kg
300 kg	650 x 500 mm	30 kg	400 kg	300 kg	200 kg
300 kg	800 x 600 mm	30 kg	400 kg	300 kg	200 kg

Sartorius Corporation
131 Heartland Blvd.
Edgewood, NY 11717

Phone: (800)-635-2906
Fax: (631)-254-4252
Web: www.sartorius.com

Sartorius Canada, Inc
2179 Dunwin Dr. Units 4&5
Mississauga, Ont. L5L 1X2

Phone: (800)-668-4234
Fax: (905)-569-7021
Web: www.sartorius.com

Sartorius Corp reserves the right to make changes to the technology, features, specifications and design of the equipment without notice.
Status: January 2007